



Aspects of Precise Orbit Determination for Geodetic and Altimetric Missions: Current Issues and Future Trends

Philip Moore
Department of Geomatics
University of Newcastle upon Tyne
Newcastle upon Tyne
NE1 7RU
Philip.Moore@Newcastle.ac.uk



Improvements in precise orbit determination

Improvements in precise orbit determination for altimeter satellites associated with

1. Improved accuracy and global distribution of tracking data e.g. DORIS, GPS
2. Gravity field enhancement
3. Surface force modelling
4. Orbit determination techniques introducing empirical/stochastic parameters for surface force and other modelling errors
5. Use of altimetry in the form of single (SXO) or dual satellite crossovers (DXO) as additional tracking data in both dynamic/reduced dynamic procedures and in empirical enhancement of less accurate orbit via cubic splines.



Orbit determination techniques introducing empirical/stochastic parameters for surface force and other modelling errors

Non-gravitational forces


- aerodynamic effects
- direct solar radiation pressure
- earth reflected and infrared radiation
- thermal forces
- charged particle drag

Surface force modelling

- satellite surface macro models .e.g box wing for TOPEX/Poseidon
- modelling of geometry and surface properties (area, outward pointing normal)
- modelling of momentum exchange between spacecraft surface and atmospheric molecules and incoming radiation
- environmental models for neutral air density models (MSIS83, DTM98), earth and albedo distribution
- eclipse model for direct solar radiation pressure (penumbra, umbra)
- surface composition (reflection characteristics - absorption, transmission, reflection), thermal properties (internal and external heating)




Surface Forces: Sample of CHAMP accelerometer data Day 144 2001 (24 May)

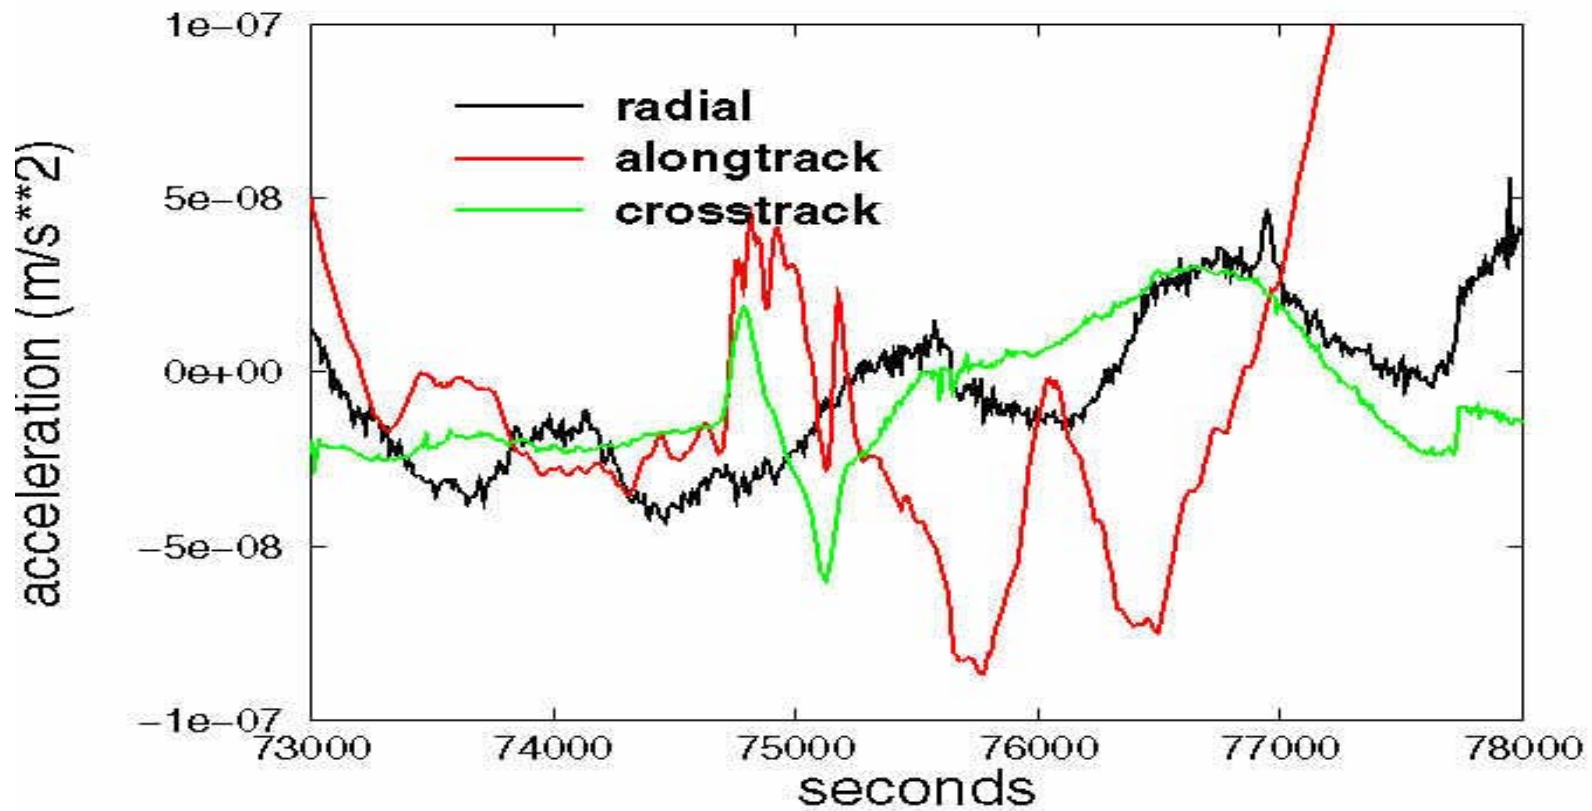




DFT analysis of accelerometer data: radial

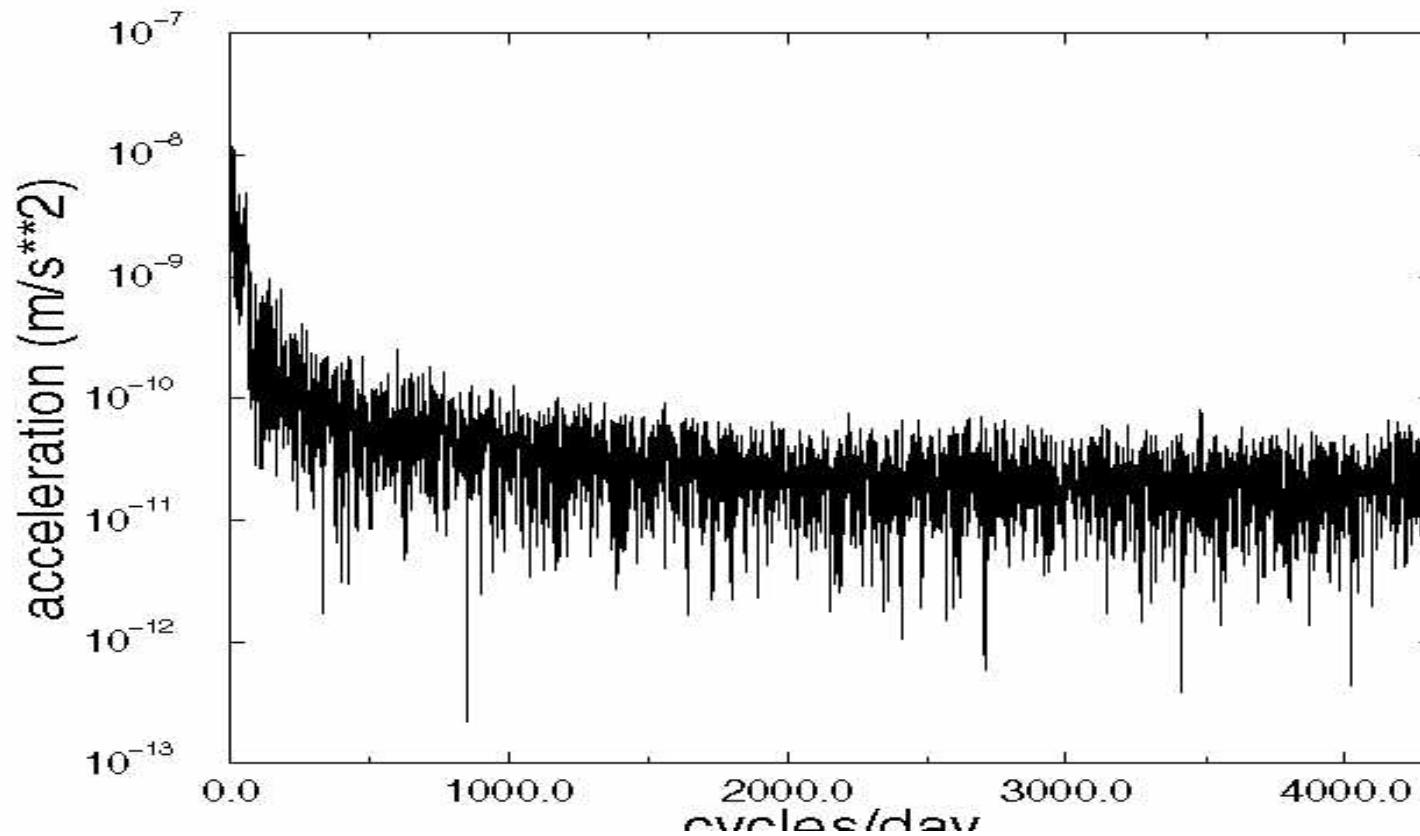




DFT analysis of accelerometer data: along-track

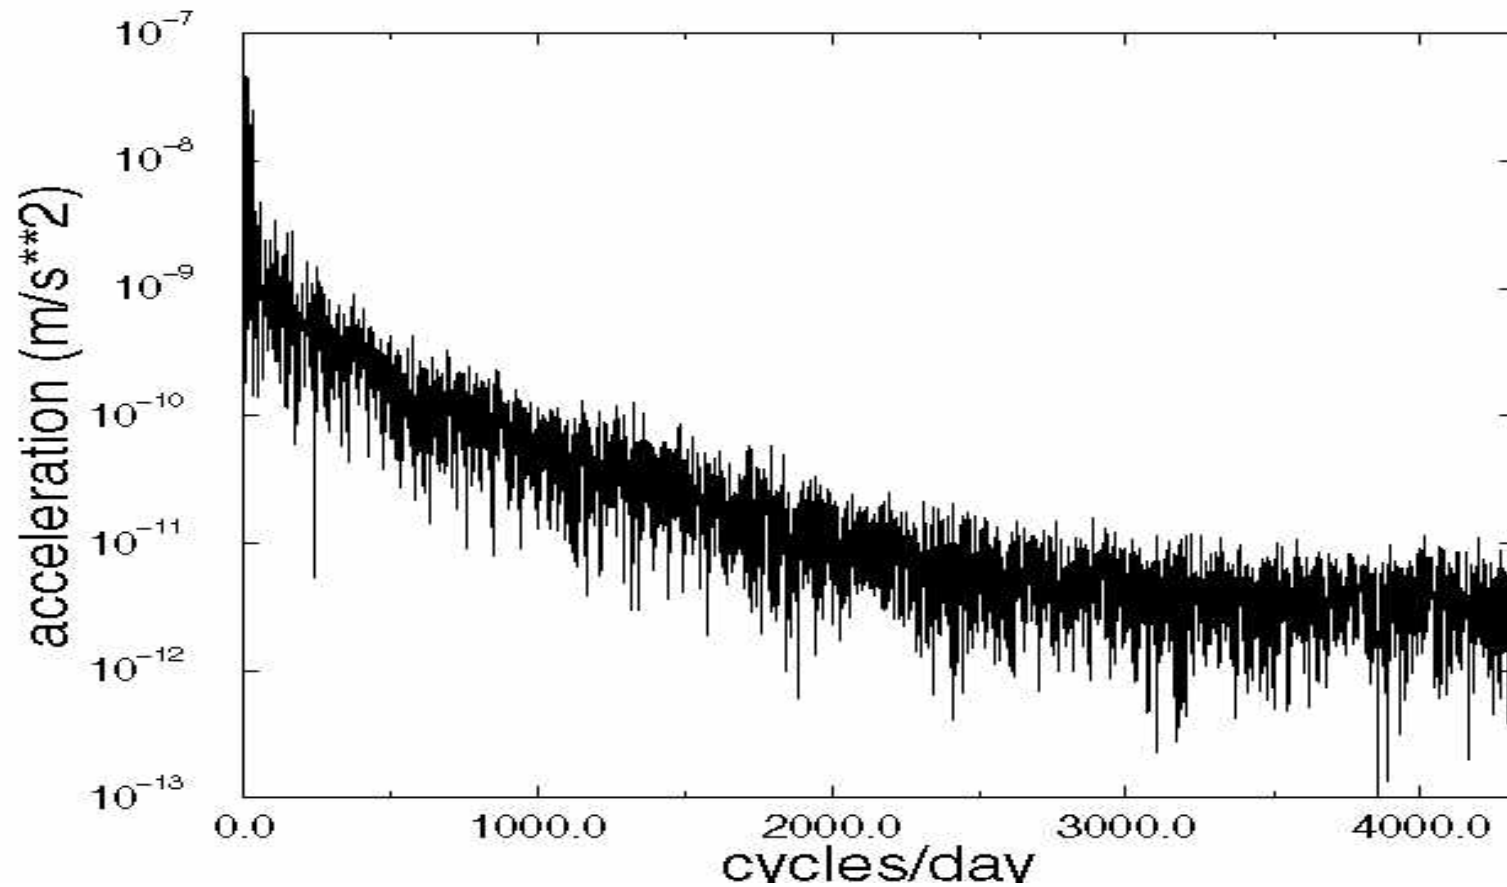




DFT analysis of accelerometer data: cross-track

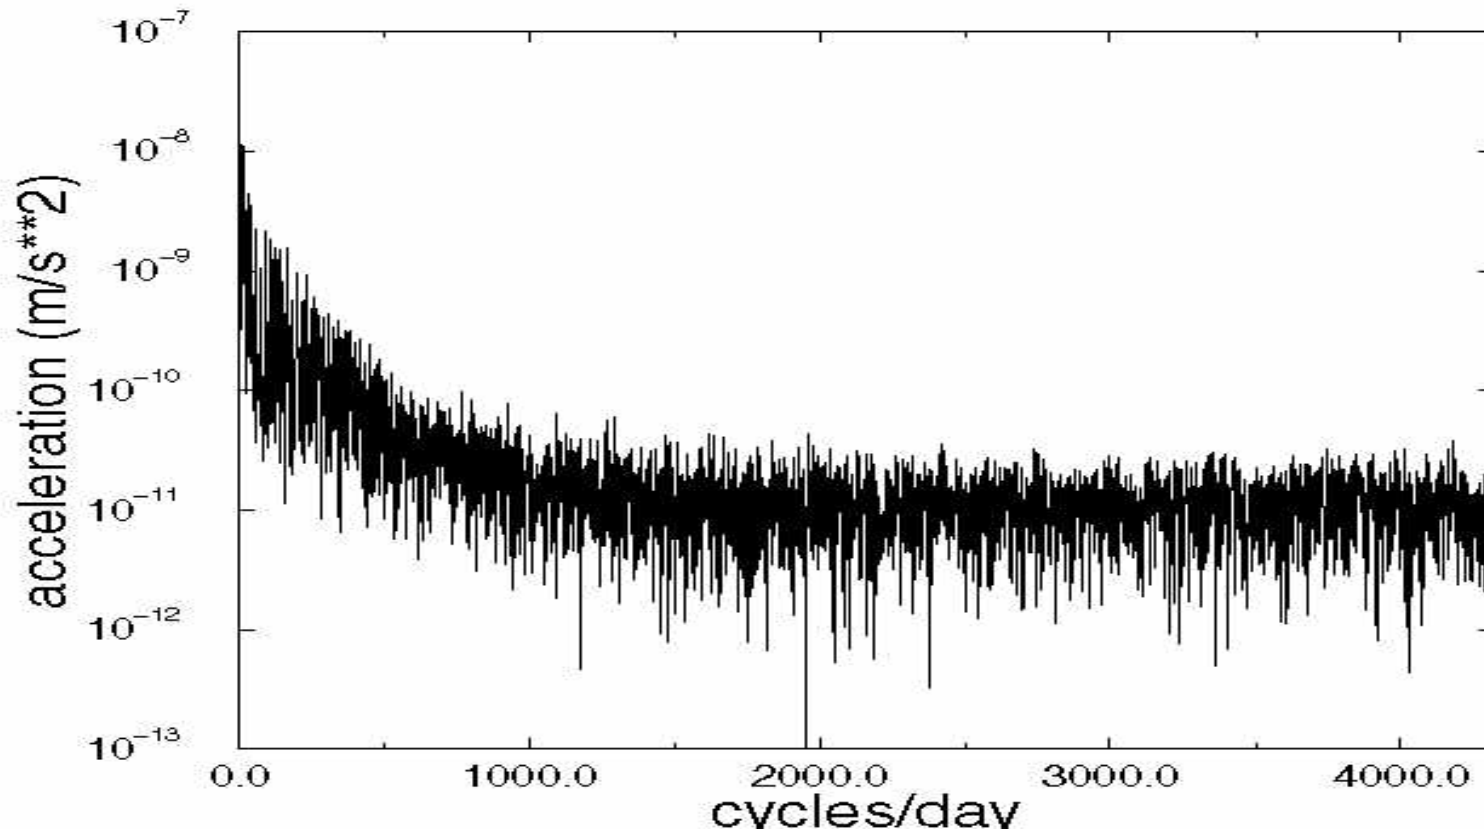



Difference between CHAMP accelerometer and modelled along-track accelerations

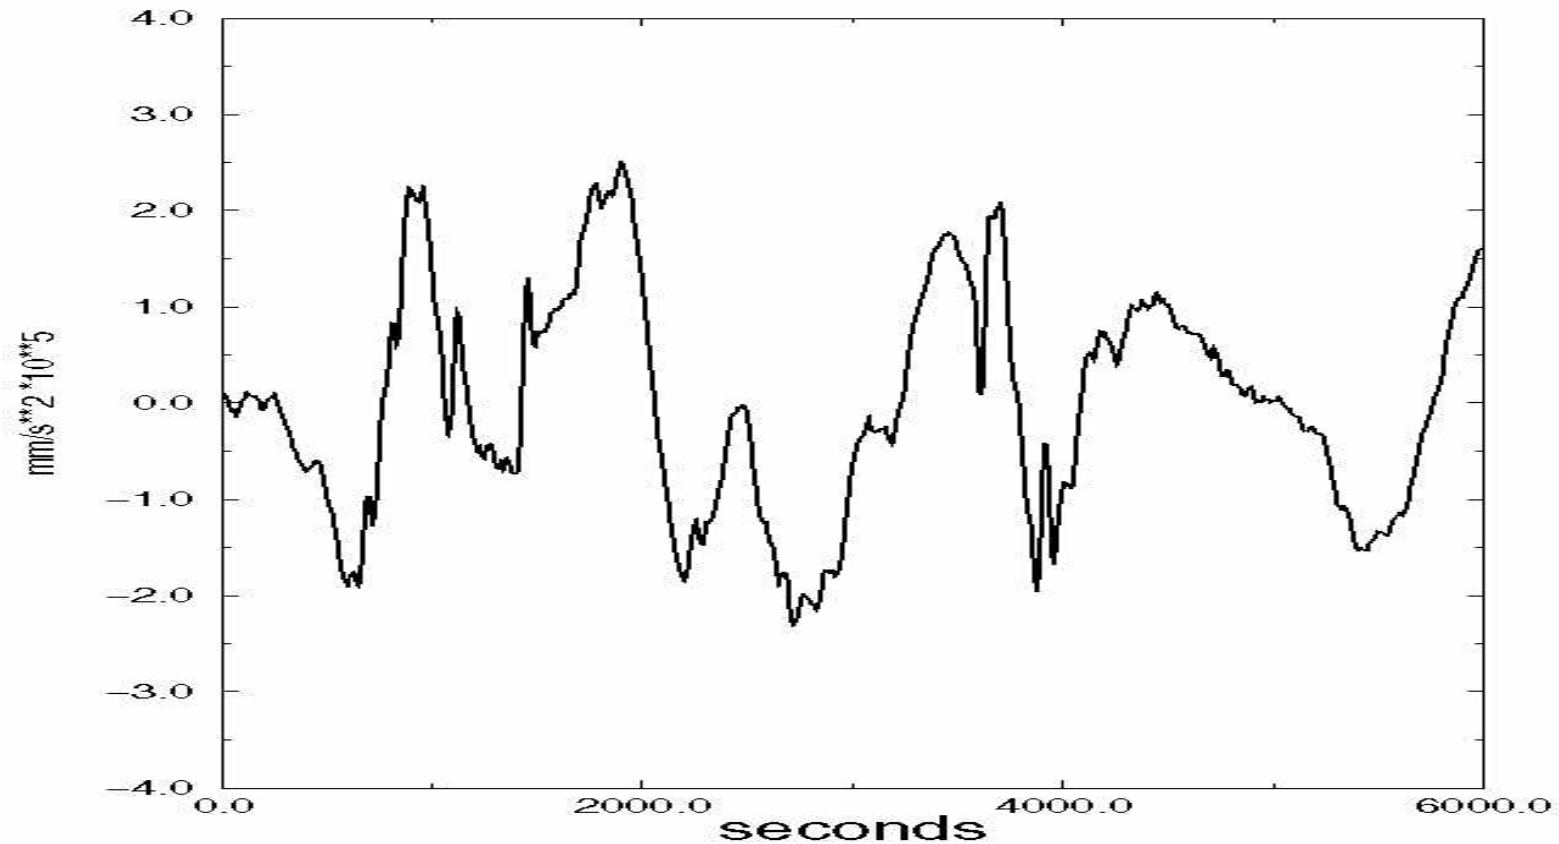



Reduced Dynamic procedure: multiple empirical parameters introduced to reduce tracking data residuals without concern about source of modelling error

With high density of tracking data and global coverage of orbit common practice is to solve for empirical corrections to poor dynamic modelling, e.g. multiple drag scale factors, 1cy/rev along/cross track accelerations. Parameters are assumed uncorrelated and solved in normal batch solutions.

If geometric data is near sufficient to support orbit determination then importance of dynamic models can be reduced and a large number of additional parameters can be introduced and recovered

Two approaches :

- 1. Utilise stochastic parameters**
- 2. Introduce multiple parameters with correlations**



Multiple parameters with correlations

Orbital errors typically 1cy/rev with amplitude slowly varying with time

In dynamic procedure 1 cy/rev empirical accelerations along-track and cross-track over say a 24hr time span are introduced to absorb mis-modelling in force model, i.e. 4 parameters per day.

In reduced dynamic models the procedure is generalised to empirical accelerations every say $\frac{1}{4}$ revolution for example , i.e. 25min for TOPEX/Poseidon.

T/P 127 revs per 10 day cycle \Rightarrow 508*4 parameters



Let along-track acceleration be $A_i \cos \omega t + B_i \sin \omega t$
then add pseudo-observations

$$A_i = A_j \quad \text{with weight } w_{i,j}$$

Where

$$w_{i,j} = \frac{e}{\sigma^2} e^{-\left| \frac{t_i - t_j}{\tau} \right|}$$

t_i reference time tag for interval i ; $t_{i+1} - t_i = \Delta t$

τ correlation time

σ standard deviation for the amplitudes A_i



Reduced dynamic orbits: example 1: Jason-1

- **Dynamic orbit**

- **State vector:**

- **Initial position/velocity**
- **6hr drag scale factors**
- **Daily empirical accelerations along/cross track**
- **Bias and trop. Scale factor for each DORIS pass**

- **Tracking**

- **SLR, DORIS (SXO – but not used in orbit determination)**

- **Reduced dynamic orbit**

- **$\Delta t = 1 \text{ hr}$**

- **240 sets of (4) empirical parameters for 10 day arc**

- **$\tau = 5 \text{ hr}$ (correlation time)**

- **$\sigma = 5.0 \text{d}^{-5} \text{ Mm/day}^{**2}$**



Reduced dynamic orbits: example 1: Jason-1

Cycle strategy	Obs. RMS		Eph RMS/mean			SXO
	SLR (cm)	DORIS (mm/s)	Radial (diff with GSFC)	cross	along	RMS/mean (cm)
4 dyn	1.95	0.45	1.84/-0.1	4.73/-1.2	6.80/0.8	6.90/0.35
r.dyn	1.06	0.45	1.65/-0.1	4.15/-1.2	6.34/1.0	6.77/0.32
8 dyn	2.26	0.41	1.55/-0.1	4.11/-0.5	5.81/1.3	7.95/-0.79
r.dyn	1.20	0.41	1.56/-0.1	4.12/-0.5	5.39/1.5	7.86/-0.76
9 dyn	2.43	0.42	1.47/-0.1	4.48/-1.1	5.01/0.8	6.98/-0.45
r.dyn	1.66	0.42	1.54/-0.1	4.14/-1.2	4.92/1.0	6.96/-0.43

Note: SXO data not included in orbit determination

DORIS freq offset/trop bias held fixed in reduced dyn. orbit



Reduced dynamic orbits: example 2: GFO



- **Dynamic orbit (19 May 2000 – 24 May 2000)**
 - **State vector:**
 - **Initial position/velocity**
 - **8hr drag scale factors**
 - **1 set empirical accelerations along/cross track**
 - **Range and time bias for GFO altimetry**
 - **Tracking**
 - **SLR, SXO, DXO with TOPEX/Poseidon**
 - **TOPEX/Poseidon orbit held fixed**
- **Reduced dynamic orbit**
 - $\Delta t = 0.5\text{hr}$
 - **120 sets of (4) empirical parameters**
 - $\tau = 1 \text{ hr}$ (**correlation time**)
 - $\sigma = 1.0\text{d}^{-4} \text{ Mm/day}^{**2}$



Reduced dynamic orbits: example 2: GFO

DATA		Obs. RMS	Eph RMS/mean		
		(cm)	Radial	cross	along
			(diff with GSFC) cm		
Dyn	SLR	6.13	6.97/0.08	23.49/-1.2	36.87/-3.1
Dyn	SLR	6.45	3.83/0.03	12.71/-1.2	25.33/-5.1
	SXO	7.98			
Dyn	SLR	7.03	3.35/0.01	14.43/-1.5	24.10/-4.6
	SXO	7.81			
	DXO	7.90			
R. Dyn	SLR	5.19	3.36/0.03	13.65/-1.5	23.71/-0.4
	SXO	7.55			
	DXO	7.54			




Precise Orbit Determination - Current status

- **Reduced dynamic Topex/Poseidon orbits: SXO residuals** 6-7cm
- **GFO and ERS orbits:**
SXO residuals ~ 7.5cm
DXO residuals ~ 7.5cm




Developments in SLR

- Observing stations submit data sub daily for MOE
- SLR2000: fully automated
- Short-arc corrections during periods of quasi-simultaneous tracking by 3 or more SLR stations applied to MOE gives radial accuracy of 10mm or better

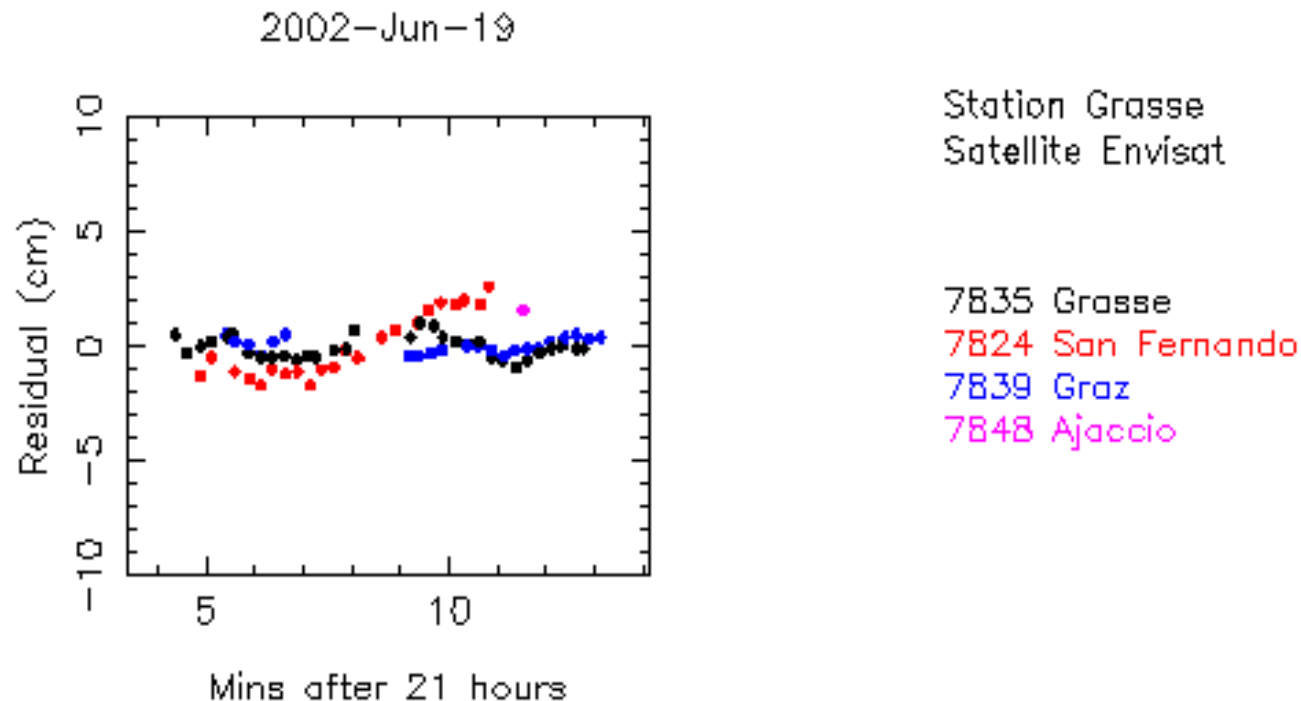



Total Data Volume (April 2001 to March 2002)

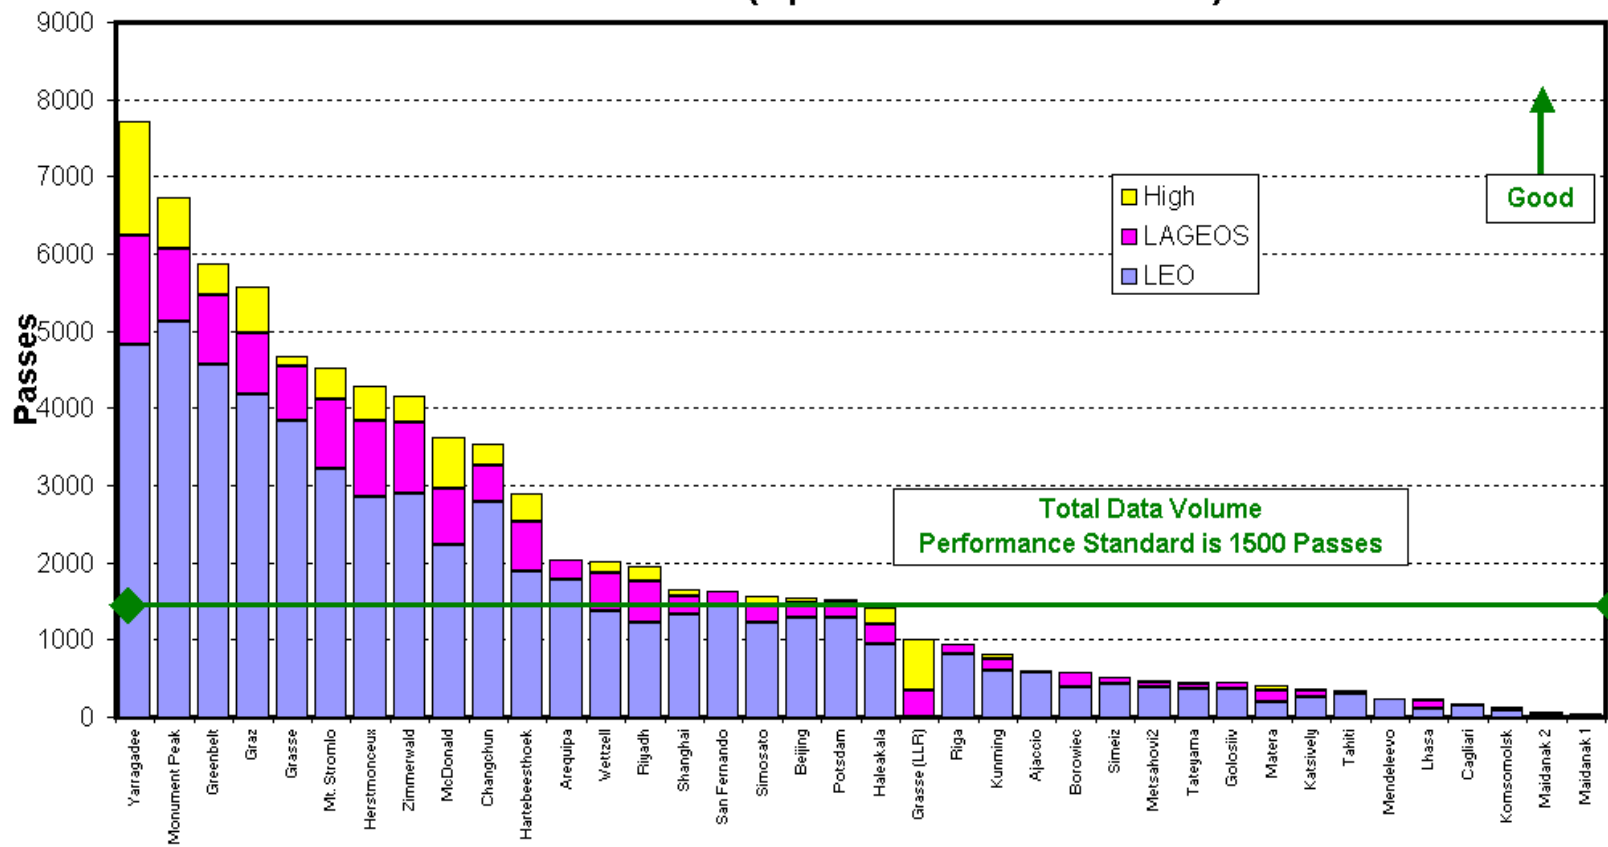



Developments in GPS



- JPL developing space borne real time orbit determination capability: Real Time Gipsy (RTG)
- RTG used on ground to compute GPS s/c orbits, 1s clock corrections and tropospheric delay parameters
- Differential corrections relayed via internet (broadband) wireless telephones such as iridium system and Inmarsat (between lat 75N and S)

Satellite	Altitude (km)	Radial rms (cm)	Cross-track rms (cm)	Along-track rms (cm)
Jason-1	1340	7	5	17
CHAMP*	450	11	8	26

* Deduced from CHAMP 30cm 3D rms and Jason-1 coordinate accuracies




Simulation of orbital enhancement using low accuracy

Cartesian positioning from GPS and DXO/SXO data

- **Five day GFO arc**
 - Cartesian positioning from reduced dynamic orbit
 - random noise, n , added to x, y, z : $n \in N(\mu, \sigma)$
 - SXO differences from GFO altimetry
 - DXO differences with T/P
 - 5 day maximum time difference for SXO/DXO data
- **Dynamic solution**
 - solution vector: $\underline{X}, \underline{\dot{X}}$; 8hr drag factors;
1cy/rev per day accel along/cross
rel. bias (DXO)




GFO SXO locations: 19-24 May 2000;
(5 day maximum difference between epochs)

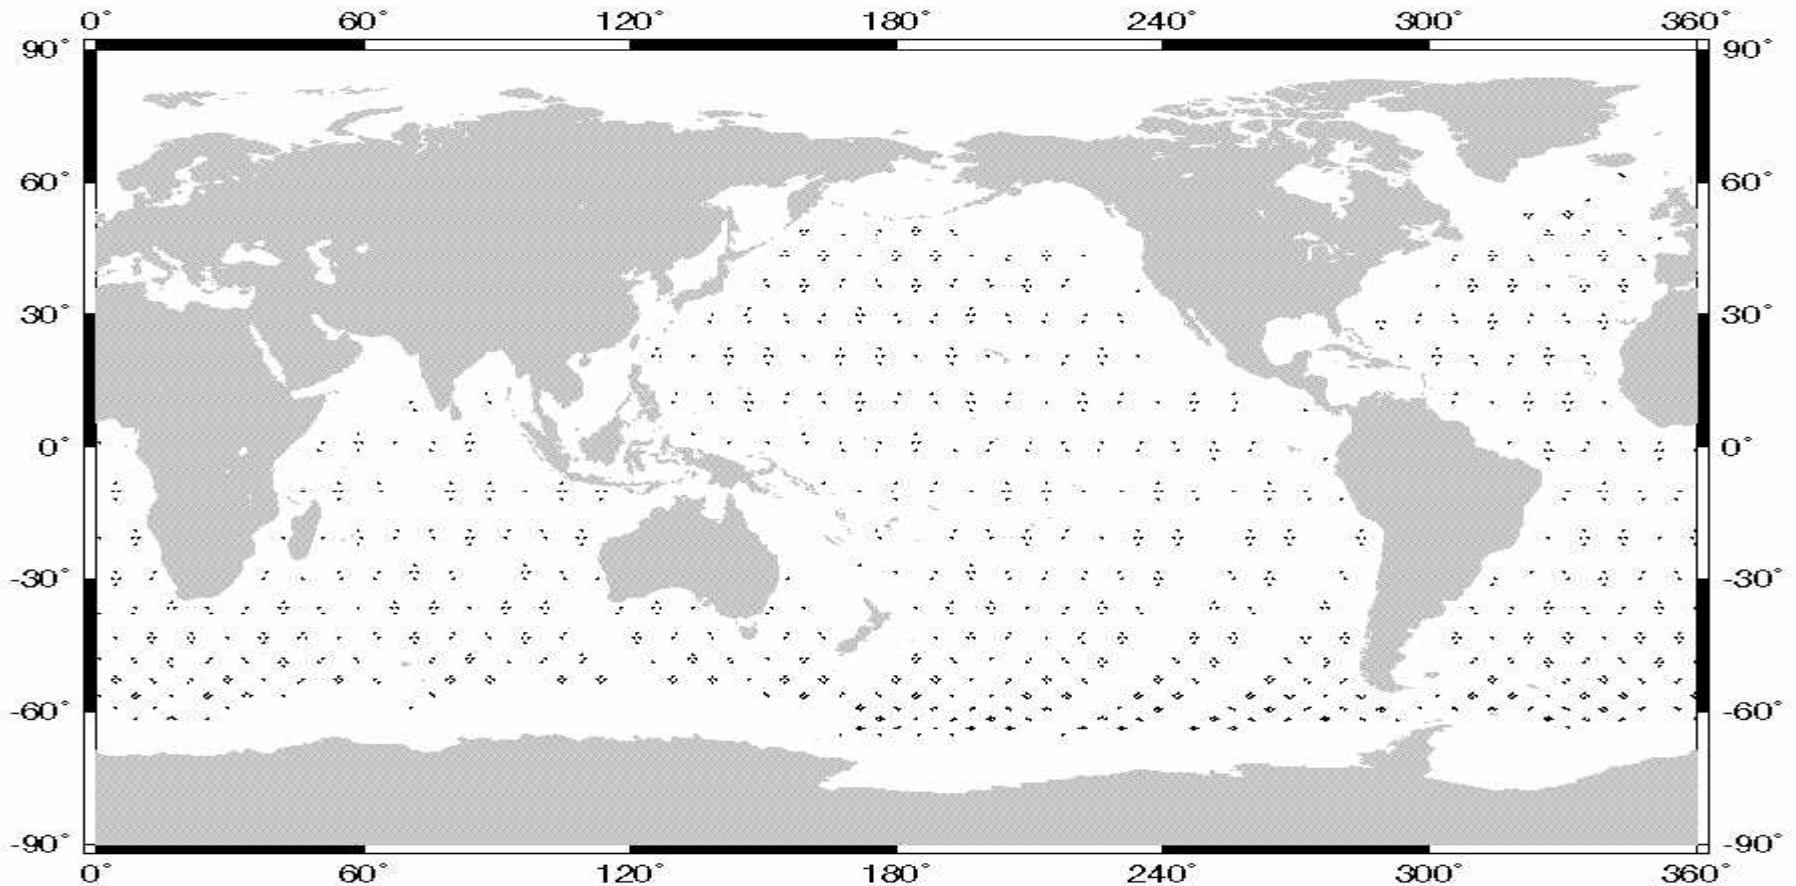



GFO-T/P DXO locations: 19-24 May 2000 (5 day maximum difference between epochs)

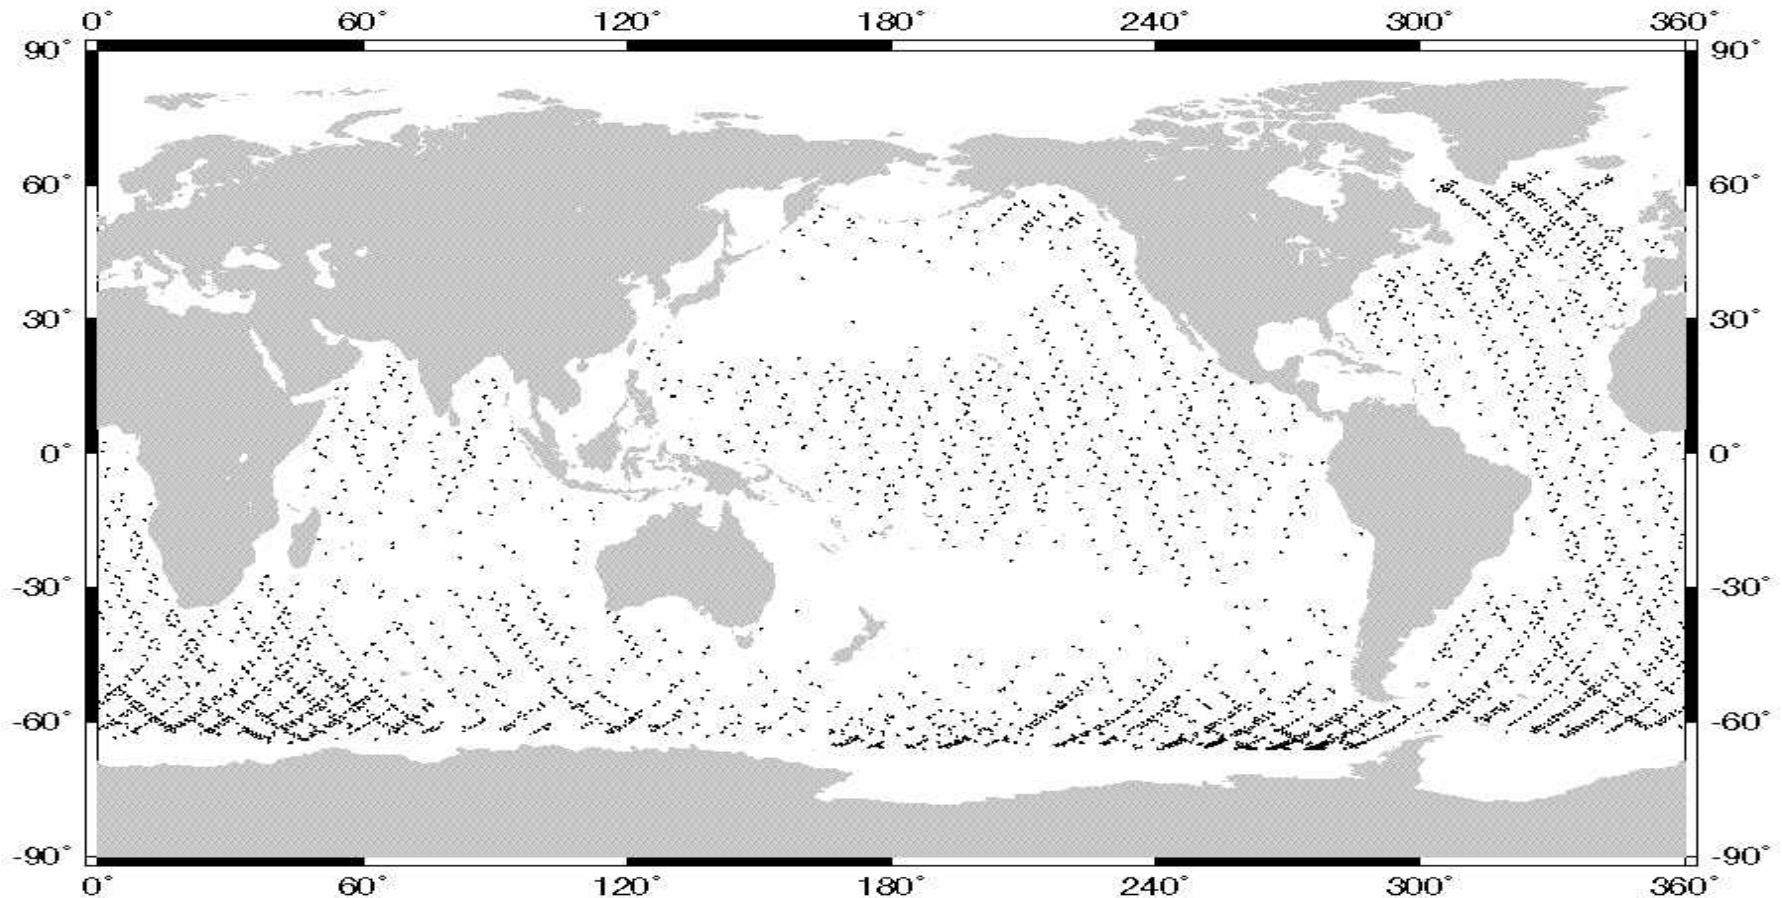



- Simulations

$N(\mu, \sigma)$	cart	cart+SXO+DXO	wt/xyz	wt/xo
$\mu=0, \sigma=1$	3.48/3.61/2.79	2.96/3.53/2.56	100	10
$\mu=0, \sigma=2$	7.43/7.20/5.90	5.41/6.48/4.64	200	10
$\mu=0, \sigma=3$	11.61/10.96/9.18	7.76/9.44/6.60	300	10
$\mu=0.1, \sigma=1$	6.12/5.60/4.36	2.80/3.50/2.49	100	10
$\mu=0.5, \sigma=1$	30.32/25.20/19.93	4.43/4.67/3.38	150	10
$\mu=0.5, \sigma=5$	32.39/29.06/23.59	11.51/15.32/10.19	500	10

μ, σ in m;

radial/cross/along differences against $N(0,0)$ in cm

weights in cm



Summary:

- **SXO/DXO data can recover radial positioning to 3(5)(8)cm for random errors with $\sigma = 1(2)(3)m$**
- **systematic errors (ie $\mu \neq 0$) in x, y not significant; z highly significant**
 - **results for $N(\mu, \sigma)$ with $\mu = 0.5m, \sigma = 5m$**

	cart. tracking		cart+SXO+DXO	
coord	rms (cm)	mean(cm)	rms (cm)	mean (cm)
x	503.1	52.2	502.9	52.6
y	500.0	49.9	499.6	48.8
z	501.9	9.6	504.0	45.2



Current Issues

Current issues: IGGOS (integrated Global Geodetic Observing System)

- **static gravity field modelling - dedicated gravity field missions (CHAMP, GRACE, GOCE)**
- **time varying field and geocentre - seasonal variations etc due to mass redistributions in atmosphere, hydrosphere, cryosphere and oceans. Geophysical models inadequate for task especially in hydrology. GRACE will provide temporal variations which can be applied retrospectively at annual cycle**
- **neutral air-density - static models inadequate for dynamic processes in atmosphere. Accelerometers on CHAMP and GRACE will give further data at heights of 450 km but extrapolation to higher altitudes problematic. Need empirical parameters to absorb deficiencies.**
- **Requirement for multi tracking data types. Lesson with GFO. Calibration and offsets data type specific. SLR proved crucial to quantify accuracy of CHAMP GPS orbits.**
- **Integration of multi-satellite altimetry requires either absolute calibration (IGGOS; GPS, tide gauge or buoys, SLR, radiometers etc) or cross calibration using DXO analyses and/or relative calibration using tide gauge data.**
- **Real time GPS v Diode**